


OD-10

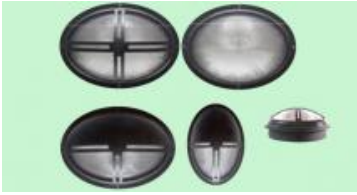

A functional oval outdoor fixture with polycarbonate lens and marine grade cast aluminium deep high wattage housing. The lens is available in clear ribbed, frost ribbed or white translucent. Wet location listed with gaskets. Optional guards available. Available in four finish options.

SPECIFICATIONS

Max Watt: 42W
Body: Marine grade cast aluminium
Trim: Marine grade cast aluminium
Finish: White - Black - Bronze - Titanium
Diffuser: Polycarbonate in White translucent - Clear ribbed - Frost ribbed
Lamps: **Q** Quad Tube - 4 Pin, **T** Triple Tube - 4 Pin, **TT** Twin Tube - 2 Pin
Ballast: 4 Pin - Electronic; 2 Pin - Magnetic



| Fixture Type | Model No | Job Reference /Location | Lamp Type/Lamp |
|--------------|----------|-------------------------|----------------|
|--------------|----------|-------------------------|----------------|

| Model | Lamps | Watts/Lamp | Ballast | Options |
|-------|-------|------------|---------------|--|
| OD-10 | 1-2 | 13 W TT | N-NPF | WH-White,BK-Black,BZ-Bronze,TI-Titanium,CR-Clear Ribbed,FR-Frost Ribbed,WT-White Trans,OP-Open Guard,EG-Eyelid Guard,CG-Cross Guard,VT-Vertical Eyelid |
| | 1 | 26Q | ED- DIMMING | |
| | 1-2 | 18T | V2-277V | |
| | 1 | 26T | V3-347V | |
| | 1 | 32T | | |
| | 1-2 | 18Q | E- ELECTRONIC | |
| | 1-2 | 13Q | F-HPF | |
| | 1 | 42T | | |

| Model | Width | Height | Max Watt | Depth/Proj. | |
|-------|---------|------------------|----------|-------------|--|
| OD-10 | 13.062" | 6.21" OP | 42W | 9.188" | Ballasts: 120V, fixtures supplied with NPF magnetic, HPF magnetic, HPF high frequency electronic ballasts. Mechanical: Fixtures mount directly to an outlet box. Approval: CSA NRTL/C |
| | 13.062" | 6.46" CG, EG, VT | | 9.188" | |