


# LWMA75

## Specifications:

**LED:** Philips LED  
**CRI:** Min 80  
**Body:** Steel  
**Diffuser:** White acrylic  
**Finish:** White powder coat  
**Driver:** Standard Triac dimming  
**Mounting:** Directly to standard J-box  
**Warranty:** 5 year on LED module/driver  
**Listing :** cULus; Damp location

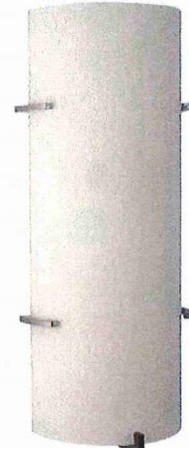

### LED information:

Size	Lumens	Wattage	Efficacy
16"	1650L	10.2w	164.1
16"	2200L	13.6w	161.7

Rectangular wall sconce utilizing LED technology. Features decorative accent bars, choice of finish options. Suitable for a variety of applications: entry ways, corridors, offices, living rooms and more.

### INC information:

Size	# of Lamps	Base	Max. wattage
16"	1	E26	100w



### Dimensions:

Model	Height	Width	Depth
LWMA7516	16.375"	6.75"	4"

### ORDERING INFORMATION

Example: LWMA7516-1650L-40K-WA-CCH-UNV

MODEL #	LED MODULE	KELVIN	OPTIONS	VOLTAGE
LWMA7516	1650L – 10.2w, 1650L	30K – 3000K	<u>LENS</u>	UNV– 120/277Vv Triac dimming
	2200L – 13.6w; 2000L	35K – 3500K	WA – white acrylic	0-10V – 0-10V dimming
		40K – 4000K		
	<u>INCANDESCENT</u>	50K – 5000K	<u>FINISH-CURED</u>	
	1-E26INC – 1 x 100w max E26		CBN – cured brushed nickel	
			CCH – cured chrome	
			CORB – cured oil rubbed bronze	
			CAB – cured antique brass	
			<u>FINISH-PLATED</u>	
			PBN – plated brushed nickel	
			PCH – plated chrome	
			PORB – plated oil rubbed bronze	
			PAB – plated antique brass	



www.ovallighting.com

Job Name			
Type			
Part #			
Lamping		Voltage	

